

129 SERIES

129B = SPST on/off

FEATURES

- Designed to meet or exceed IP55
- Choice of Colors and Markings
- Crisp detent action



*Switches marked 🔁 are acceptable for use as power switches provided there is a plug disconnect or a switch with open contact gaps of 3 mm minimum.

MOUNTING

MATERIAL	Χ	Υ
.75 - 1.25	37.3+0.1	21.2-0.1
1.25 - 2.0	37.5+0.1	21.2-0.1
2.0 - 3.0	37.9+0.1	21.2-0.1

No hardware or tools needed, self locks into proper panel cutout .835" (21.2 mm) x 1.468 to 1.492" (37.3 to 37.9 mm).

Acceptable panel thickness range is from .030 $^{\prime\prime}$ (.75 mm) to .118 $^{\prime\prime}$ (3.00 mm).



CAUTION! Burr direction must be away from the direction of insertion.

TERMINATION

Standard is solderless .250" (6.35 mm) wide \times .032" (.81 mm) thick.


Solder terminals & screw terminals are also available.

AMPS	VOLTAGE
16 A.	125VAC (CSA)
15 A.	125VAC (UL)
10 A.	250VAC
3/4 H.P.	250VAC
10A	24VDC
20A	12VDC

APPROVALS

UL, CUL, CSA, IP55, RoHS compliant

SWITCH SELECTION CHART										
Part No.	Circuit	Special Markings	Black	White	Red	Blue	Green	Amber		
129B-18	SPST on/off							\Box		
129B-19	SPST on/off				•					
129B-56	SPST on/off			0						
129B-250W	SPST on/off	White "- O" Print								
129B-315W	SPST on/off	White "ON OFF" Print								

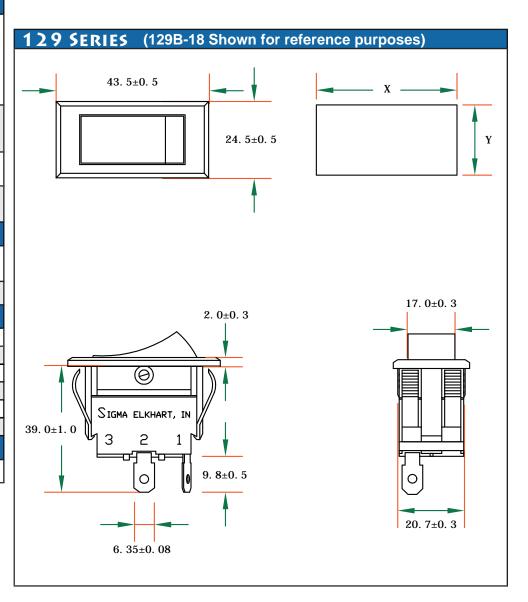



OUR COMMITMENT TO YOU

We are constantly adding to and improving our selection of Rocker, Toggle, Push Button and other types of switches. If you don't find it here, or on the pages of our website, feel free to contact us for the most current information. If you need a specially designed custom switch, we can discuss your custom design requirements as well. We look forward to helping you with your next switch purchase.