



SIGMA
SWITCHES PLUS

2 SERIES

ZZ = Indicator Light

FEATURES

- LED Illumination Or Bright Incandescent Or Neon Bulb.
- Custom colors & printing available upon request
- Easy To Terminate With Solderless Connectors
- Easy self-locking panel mount, no hardware required

MOUNTING

No hardware or tools needed. Self locks into proper panel cutout 13.2mm (0.519") x 19.2 to 19.8mm (0.756 to 0.799").

Acceptable panel thickness range is from .75mm (0.030") to 3.00mm (0.118").



CAUTION! Burr direction must be away from the direction of insertion

TERMINATION

Standard is solderless 4.75mm (0.187") wide x 0.81mm (0.032") thick. Solder terminals are also available.

APPROVALS


RoHS compliant

SWITCH SELECTION CHART

| Part No. | Circuit | Special Markings | BLK | WHT | RED | BLU | GRN | AMB | BRN | IVY |
|-----------|----------------------|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Z6-02 | 12V Indicator Light | LED/Incandescent Bulb | ○ | | | ○ | | | | |
| Z6-03 | 12V Indicator Light | LED/Incandescent Bulb | ○ | | ○ | | | | | |
| Z6-03-125 | 125V Indicator Light | 125V Neon | ○ | | ○ | | | | | |
| Z6-03-250 | 250V Indicator Light | 250V Neon | ○ | | ○ | | | | | |
| Z6-04 | 12V Indicator Light | LED/Incandescent Bulb | ○ | | | | | ○ | | |
| Z6-05 | 12V Indicator Light | LED/Incandescent Bulb | ○ | | | | ○ | | | |

2 SERIES (Z6-03 SHOWN FOR REFERENCE PURPOSE ONLY)

| Mat'l Thickness | X | Y |
|-----------------|----------|----------|
| 0.75 - 1.25 | 19.2-0.1 | 13.2+0.1 |
| 1.25 - 2.00 | 19.4-0.1 | 13.2+0.1 |
| 2.00 - 3.00 | 19.8-0.1 | 13.2+0.1 |

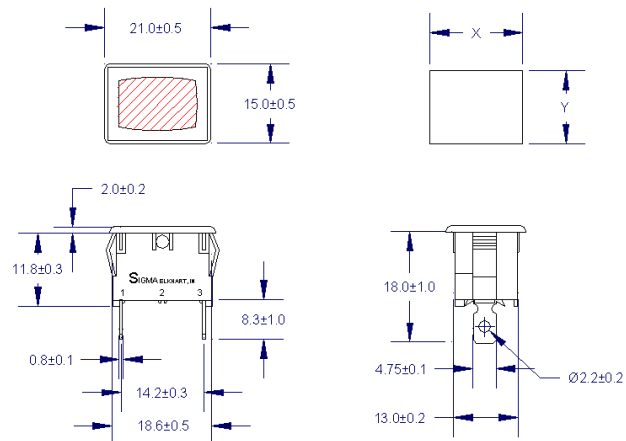

SIGMA
SWITCHES PLUS

4703 Wyland Dr.
Elkhart, IN 46516

Ph: 574-294-5776

Fax: 574-294-8744

www.sigmaswitches.com

OUR COMMITMENT TO YOU

We are constantly adding-to and improving our selection of Rocker, Toggle, Push Button and other types of switches. If you do not find what you need here, or on other pages of our web site, please do not hesitate to contact us. If your need is custom, we would like to discuss your unique design requirements as well.

Thank you for giving us the opportunity to fulfill Your switching needs!