



FEATURES

- Bright Incandescent or Neon Bulb.
- Custom Colors and Printing available upon request

MOUNTING

MATERIAL	X	Y
.75 - 1.25	19.2	13.2
1.25 - 2.0	19.4	13.2
2.0 - 3.0	19.8	13.2

No hardware or tools needed, self locks into proper panel cutout .519" (13.2 mm) x .756 to .799" (19.2 to 19.8mm).

Acceptable panel thickness range is from .030" (.75 mm) to .118" (3.00 mm).



CAUTION! Burr direction must be away from the direction of insertion.


TERMINATION

Standard is solderless .187" (4.75 mm) wide x .032" (.81 mm) thick.

SWITCH SELECTION CHART

Part No.	Description	Voltage	Black	White	Red	Blue	Green	Amber
Z6-03	Indicator Light	12 VDC	●	○	●	○	○	○
Z6-03-125	Indicator Light	125 VAC	●	○	●	○	○	○
Z6-03-250	Indicator Light	250 VAC	●	○	●	○	○	○

6 SERIES (Z2-03 Shown for reference purposes)

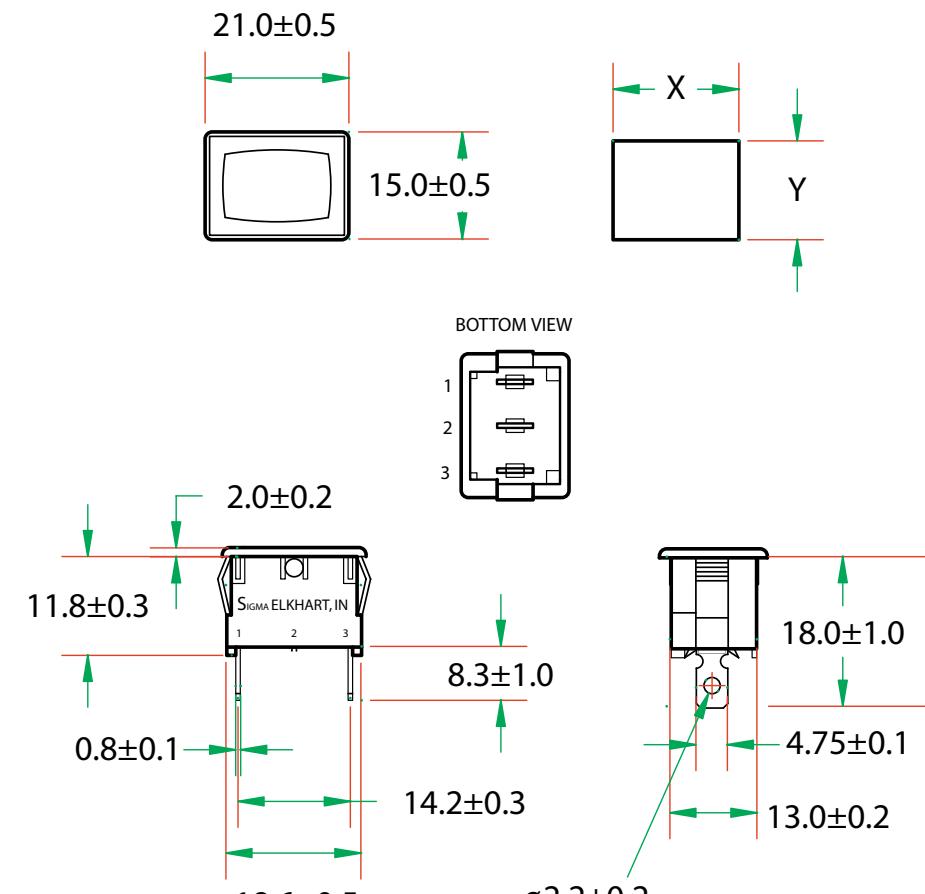

OUR COMMITMENT TO YOU

We are constantly adding to and improving our selection of Rocker, Toggle, Push Button and other types of switches. If you don't find it here, or on the pages of our website, feel free to contact us for the most current information. If you need a specially designed custom switch, we can discuss your custom design requirements as well. We look forward to helping you with your next switch purchase.



SIGMA
SWITCHES PLUS
4703 Wyland Dr.
Elkhart, IN 46516
Tel: 574-294-5776
Fax: 574-294-8744

www.sigmaswitches.com